



STANFORD

*Lecture 6*

# **Spatial Modulation & Wireless Examples**

*April 18, 2024*

**JOHN M. CIOFFI**

Hitachi Professor Emeritus of Engineering

Instructor EE379B – Spring 2024

# Announcements & Agenda

- Announcements
  - Problem Set #3 is due Wed April 24
  - Readings 4.4, 4.6, 4.7
  - Midterm Thursday May 2 in class (open book, notes, laptop, internet)
  - Must leave for airport, so office hours immediately here after class.
- Agenda – Today is Examples:
  - Wi-Fi
  - Digital Video Broadcast
  - Cellular

<b>Multi-User Communication</b>				
<b>Dimensionality Fundamentals (Sections 1.3, 2.4, 4.1-4.7)</b>				
1	4/2	Introduction and Dimensionality	1.3.4-7, 2.1-5, 4.1-3	1/-
2	4/4	Channel Partitioning: Vector Coding & DMT	2.5, 4.4-4.7	-/-
<b>Information Measures</b>				
3	4/9	MMSE Estimation and Information Measures	1.5, D.1-2, 2.3, 4.1	2/1
4	4/11	Capacity, Separation Thm, & C-OFDM	2.5, 4.4	-/-
5	4/16	Adapting Modulation Coding Scheme	1.6, 2.5, 4.4	-/-
6	4/18	Wireless Space-Time Examples	4.6, 4.7	3/2
<b>Multi-User Fundamentals</b>				

Final Exam:

normal – June 10, 8:30-11:30?  
(JC at conference then)

some kind of timed interval at  
convenient times last week of classes?

Other proposals?




# Wi-Fi Use-Case Example

*Section 4.7*

# Wi-Fi Channel Variability/Range

- W-Fi Channels are 20 MHz wide ( $T' = 50$  ns).
- Example channel has 1 extra path with delay = 200 ns = 60 m @ speed of light.
- Some tones have higher gain, but
- roughly  $\frac{1}{4}$  -  $\frac{1}{3}$  of tones' gains are below the previous single path threshold (red line).
- Code roughly needs at least  $\frac{1}{4}$  parity
  - to recover this lost  $\frac{1}{4}$  of information.
- Thus  $\frac{3}{4}$ ,  $\frac{2}{3}$ , and  $\frac{1}{2}$  code rates are of interest.

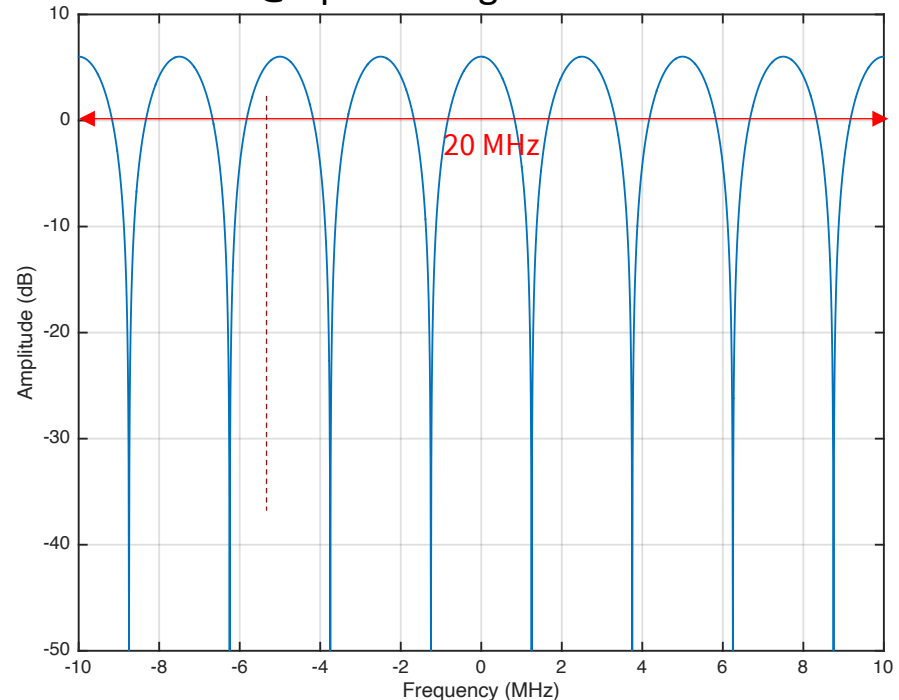

**Coded OFDM**




# Wi-Fi's 20-320 MHz Channels

11g, n

“Wi-Fi 4”

n has  $L \leq 4$

## 2.4 GHz channels (U.S.)

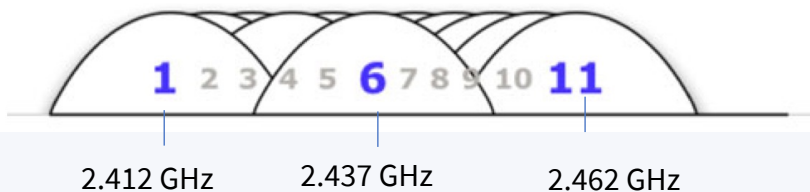

Only 1, 6, 11 avoid Overlap, so really 3 channels

(max  $L$ )

## 5 GHz channels (U.S.)



$$f_c = 5108 + i \cdot 20, i = 4m, m = 0, \dots, 7, 16 \dots 26 \text{ or } 5745 + i \cdot 20, i = 4m, m = 0, \dots, 4$$



5 GHz band: used by 802.11n (Wi-Fi 4), 802.11ac (Wi-Fi 5), 802.11ax (Wi-Fi 6), and to a lesser extent by cellular in unlicensed (LWA, MultiFire)

Up to 71 channels (20 MHz)



WiFi 7 allows  $m = 5$

- Unlicensed – so multiple systems can collide – detect collect, retransmit after random wait.



# Base Wi-Fi OFDM for 20 MHz

- Complex sampling rate

$$\frac{1}{T'} = 20 \text{ MHz}$$

- Number of carriers

$$N=64$$

- Carrier Spacing

$$\Delta f = \frac{20}{64} = 312.5 \text{ kHz}$$

- Cyclic Extension, Symbol Period  $T = (N + \nu)T'$

$$\nu = 16$$

$$T = 4 \mu\text{s} \ \& \ 1/T = 250 \text{ KHz}$$

- Bits/tone

$$b_n \in \{2, 4, 6, 8, 10\}$$

- Used Carriers = 48

- Tone 32 at edge is not used, nor are -27...-31, 27 ... 31
- Pilots are at -21, -7, 7, 21 and 0 is not user data



# 802.11a, g Table

Statistical loaded  
On a single  
 $SNR_{ofdm}$

$R$ (Mbps)	“ $M$ ” constellation	code rate	$b_n$	$\bar{b}_n$	$b$
6	BPSK	1/2	1/2	1/4	24
9	BPSK	3/4	3/4	3/8	36
12	4QAM	1/2	1	1/2	48
18	4QAM	3/4	3/2	3/4	72
24	16QAM	1/2	2	1	96
36	16QAM	3/4	3/2	3/4	144
48	64QAM	1/2	3	3/2	192
54	64QAM	3/4	9/2	9/4	216

$$R = \log_2(M) \cdot (\text{code rate}) \cdot (48 \text{ tones}) \cdot 250 \text{ kHz} = [0.5, 1, 2, \text{ or } 3] \cdot (12 \text{ or } 18) \text{ Mbps.}$$

- All tones have equal energy: Power is 16 dBm, 20 dBm, or 29 dBm.
- Receiver (effectively) chooses 1 of these 8 loadings or “profiles” by reverse-channel indications to transmitter.



# Example Computations & Codes

- 48 tones x 4 bits/tone (16QAM) x  $\frac{3}{4}$  (code rate) x 250 kHz = 36 Mbps.
- 48 tones x 6 bits/tone (64 QAM) x  $\frac{2}{3}$  (code rate) x 250 kHz = 48 Mbps.
- MCS indication is returned by rcvr to xmit via control/reverse channel.
- Codes are convolutional:
  - 64-state rate-1/2 code (organized 6 of 12)
    - Punctured (2/3 - delete 4 bits from 12)
    - Punctured (3/4 - delete 3 bits from 12)

Code rate	Free distance	(gross) coding gain $10 \log (d_{free})$
$\frac{1}{2}$	10	10 dB
$\frac{2}{3}$	6	7.7 dB
$\frac{3}{4}$	5	7 dB





# 802.11 n, ac , ax

- n,ac,ax allow a shorter cyclic extension & up to 256 QAM.
- N, ac, ax allow  $1/T' = 40$  MHz (N=128). The number of data-carrying tones is 108.
  - So 20 are used for pilots, or silenced at edges.

**40 MCS choices**

constellation	code rate	$1/T' = 20$	$1/T' = 20$ MHz	$1/T' = 40$	$1/T' = 40$ MHz
		$\nu = 16$ Mbps	$\nu = 8$ Mbps	$\nu = 16$ Mbps	$\nu = 8$ Mbps
BPSK	1/2	6.5	7.2	13.5	15
4QAM	1/2	13	14.4	27	30
4QAM	3/4	19.5	21.7	40.5	45
16QAM	1/2	26	28.9	54	60
16QAM	3/4	39	43.3	81	90
64QAM	2/3	52	57.8	108	120
64QAM	3/4	58.5	65	121.5	135
64QAM	5/6	65	72.2	135	150
256QAM	3/4	78	86.6	162	180
256QAM	5/6	86.7	96.3	180	200

- For 20 MHz,
  - Carriers -28,-27,27 and 28 are used, so data rates increase by  $52/48 = 13/12 \times (12 \text{ or } 18)$  Mbps – so thus 13 or 19.5 Mbps

$$R = \log_2(M) \cdot r \cdot 52 \cdot 250\text{kHz} = [.5, 1.2, 3] \cdot (13 \text{ or } 19.5) \text{ Mbps}$$

- For 40 MHz:

$$R = \log_2(M) \cdot (\text{code rate}) \cdot (108 \text{ tones}) \cdot 250 \text{ kHz} = [0.5, 1, 2, \text{ or } 3] \cdot (27 \text{ or } 40.5) \text{ Mbps}$$

**Or 10/9 x these numbers for  $\nu = 8$**



# 802.11n Table with 4 x 4 MIMO

constellation	code rate	$1/T' = 20$	$1/T' = 20$ MHz	$1/T' = 40$	$1/T' = 40$ MHz
		$\nu = 16$ Mbps	$\nu = 8$ Mbps	$\nu = 16$ Mbps	$\nu = 8$ Mbps
BPSK	1/2	6.5	7.2	13.5	15
4QAM	1/2	13	14.4	27	30
4QAM	3/4	19.5	21.7	40.5	45
16QAM	1/2	26	28.9	54	60
16QAM	3/4	39	43.3	81	90
64QAM	2/3	52	57.8	108	120
64QAM	3/4	58.5	65	121.5	135
64QAM	5/6	65	72.2	135	150
256QAM	3/4	78	86.6	162	180
256QAM	5/6	86.7	96.5	180	200

ONLY FOR 802.11ac/ax (Wi-Fi 6)

40 MHz  
2 adjacent  
channels  
as one



Can make  
collisions  
more likely,  
effectively  
reducing # of channels

- 802.11n allows 4 x 4 Vector OFDM, so data rates in any column can be multiplied by 4,
  - which means 600 Mbps on the 64 QAM (would be 800 Mbps if 256 QAM were used).
- While there is SVD on each tone, all 802.11n spatial dimensions use the same coding line chosen above.



# Wi-Fi 6 = 802.11ax – up to 4 channels bonded

Modulation and coding schemes for single spatial stream

MCS index <sup>[a]</sup>	Modulation type	Coding rate	Data rate (in Mb/s) <sup>[b]</sup>							
			20 MHz channels		40 MHz channels		80 MHz channels		160 MHz channels	
			1600 ns GI <sup>[c]</sup>	800 ns GI	1600 ns GI	800 ns GI	1600 ns GI	800 ns GI	1600 ns GI	800 ns GI
0	BPSK	1/2	4(?)	4(?)	8(?)	9(?)	17(?)	18(?)	34(?)	36(?)
1	QPSK	1/2	16	17	33	34	68	72	136	144
2	QPSK	3/4	24	26	49	52	102	108	204	216
3	16-QAM	1/2	33	34	65	69	136	144	272	282
4	16-QAM	3/4	49	52	98	103	204	216	408	432
5	64-QAM	2/3	65	69	130	138	272	288	544	576
6	64-QAM	3/4	73	77	146	155	306	324	613	649
7	64-QAM	5/6	81	86	163	172	340	360	681	721
8	256-QAM	3/4	98	103	195	207	408	432	817	865
9	256-QAM	5/6	108	115	217	229	453	480	907	961
10	1024-QAM	3/4	122	129	244	258	510	540	1021	1081
11	1024-QAM	5/6	135	143	271	287	567	600	1134	1201

160 MHz  
8 adjacent  
Channels  
as one



Back to only  
3 non-overlapping  
channels,  
So Wi-Fi 6E  
(expands 5-7 GHz)

- 4 channels use N=256 with 234 carrying user data.
- 8 channels use N=512 with 484 carrying user data,
- With up to 8x8 MIMO on 11ax → 10 Gbits (almost).

96 choices in loading

$M$  is also sent to xmit for MIMO  
(one for each tone).

Web tutorial on  
this by former  
student of this class  
[R. Nabar](#)



# Wi-Gig is Wi-Fi, 802.11ad ~ 60 GHz

- Carrier frequencies (Six 2.16 GHz channels)

Channel	Center (GHz)	Min. (GHz)	Max. (GHz)	BW (GHz)
1	58.32	57.24	59.4	2.16
2	60.48	59.4	61.56	
3	62.64	61.56	63.72	
4	64.8	63.72	65.88	
5	66.96	65.88	68.04	
6	69.12	68.04	70.2	

- Parameters:  $\frac{1}{T'} = 2.64 \text{ GHz}$     $\Delta f = \frac{2640}{512} = 5.15625 \text{ MHz}$

$N=512$  with 336 used

$\nu=128$

$$\frac{1}{T} = \left( \frac{N}{N+\nu} \right) \cdot \Delta f = 4.125 \text{ MHz}$$

## OFDM data rates [\[ edit \]](#)


MCS index	Modulation type	Coding rate	Phy rate (Mbit/s)	Sensitivity (dBm)	EVM (dB)
13	SQPSK	1/2	693	-66	-7
14		5/8	866.25	-64	-9
15	QPSK	1/2	1386	-63	-10
16		5/8	1732.5	-62	-11
17		3/4	2079	-60	-13
18	16-QAM	1/2	2772	-58	-15
19		5/8	3465	-56	-17
20		3/4	4158	-54	-19
21		13/16	4504.5	-53	-20
22	64-QAM	5/8	5197.5	-51	-22
23		3/4	6237	-49	-24
24		13/16	6756.75	-47	-26

EVM is same as MSE



# Digital Video Broadcast

# Single-Frequency Network (SFN)

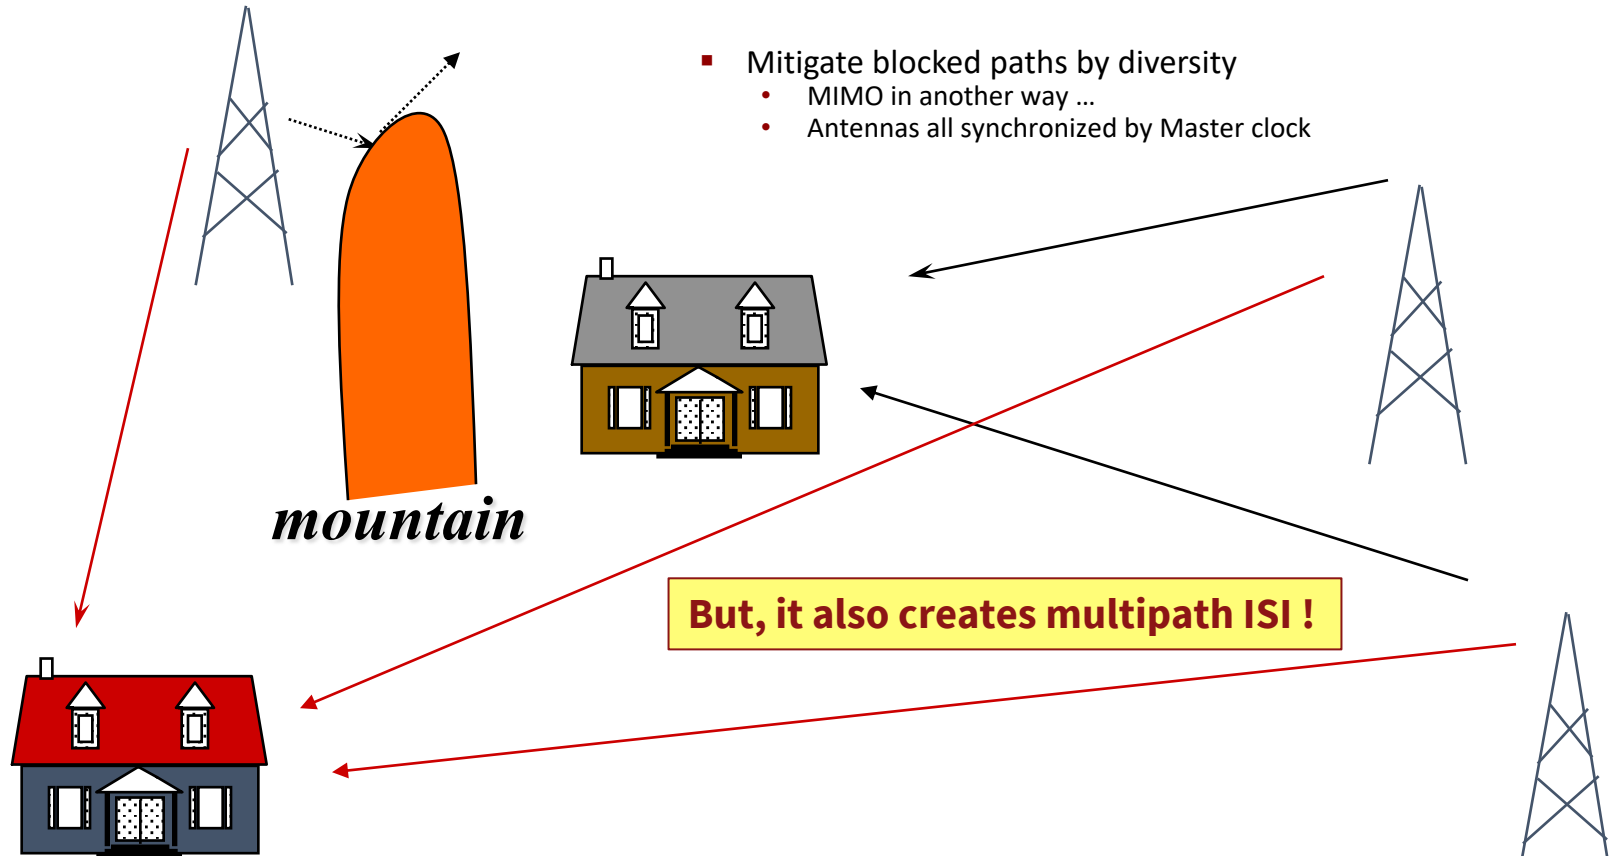

# DVB Standard uses Coded OFDM

- Parameters

carrier(s) Carrier frequencies are same as analog TV spacing 6 MHz, 7.61 MHz, 8 MHz *52 MHz = channel 2*

sampling  $T' = 10.9375 \text{ ns}$   $\frac{1}{T'} \cong 9.14 \text{ MHz}$

symbol size  $N = 2048$  or  $8192$

tone width  $\Delta f = 44.64 \text{ kHz}$  Or  $11.16 \text{ kHz}$

prefix (es)  $v = \left( \frac{1}{2^i} \right) \cdot N \quad i = 2, 3, 4, 5$

**DVB uses LDPC code mentioned in 379A.**

symbol rate Symbol rates vary  $\sim 10 \text{ kHz}$



# Cellular Examples 4G & 5G



# 4G and 5G wireless = Cellular (licensed bands)

- Mobile/cellular connectivity also uses OFDM (and vector OFDM).
- 4G uses up to 4 xmit/rcvr antennas.
- 5G allows use of much larger number of antennas (Massive MIMO),
  - usually best 32 of 128 at cell site (smaller at device, typically 2-4).
- Cellular uses 500  $\mu$ s time “slots” (20 of them in a “frame” of 10 ms).
- Each time slot uses an integer tone-width index  $m=1,2,4,8, 12,$  and 16 to multiply:

$$\Delta f = 15 \text{ kHz}$$


$$\frac{1}{T'} = (1.92 \text{ MHz}) \cdot m \quad N = 128 \cdot m \quad , \quad m = 1,2,4,8,12,16$$

$$m \cdot 960 \text{ samples/slot} \quad , \quad m = 1,2,4,8,12,16$$



# Short and Long Cyclic Prefixes


Short Prefix

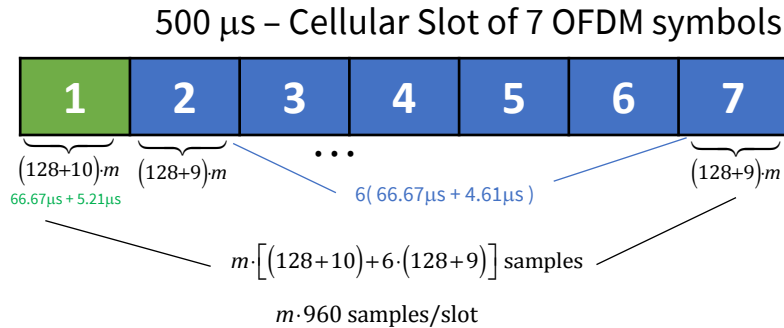

**data rates are multiples  
of 14 kbps**

$$\left( \frac{7}{500\mu\text{s}} \right)$$

Long Prefix

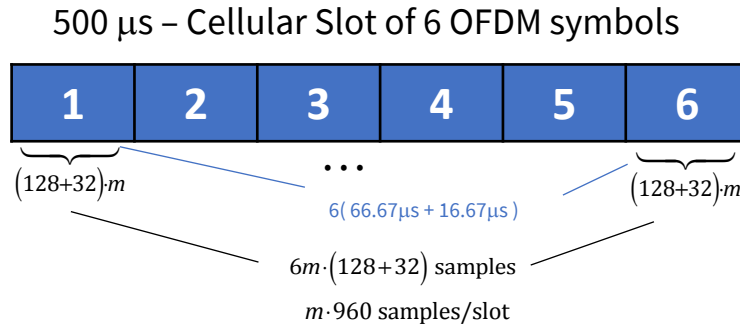

**data rates are multiples  
of 12 kbps**

$$\left( \frac{6}{500\mu\text{s}} \right)$$

- Each symbol decomposes into “resource elements” and “resource blocks.”



# CELLULAR's Resource Blocks (RBs) – 12-tone groups



- RB is Smallest unit that can be assigned to a user – loading applies to RBs (but not to individual tones) – 12 tones within a single symbol.
  - Single MCS to any one user though, no matter how many RBs (I think).
- There can be pilots, synch symbols, and other overhead scattered throughout a slot so total number of tones need not be a multiple of 12.



# Low Bandwidth (small devices) Cellular

bw dth MHz	$m$	$1/T'$ MHz	$N + \nu_s$ ( $1/T_s = 14$ kHz)	$N^*$ used tones	samples slot	$\Delta f$ kHz	RBs Resource blocks	$b_{min}$	$L$	$R_{min}$
			$N + \nu_l$ (*) ( $1/T_l = 12$ kHz)					$b_{mid}$		$R_{mid}$
1.25	1	1.92	128+6.17	76	960	15	6	2	1	2.016
			128+32					4	1	4.032
								6	1	6.048
								6	2	12.096
							6	4	24.192	
3	2	3.84	256+12.33	181	1920	15	15	2	1	5.04
			256+64					4	1	10.08
								6	1	15.12
								6	2	30.24
								6	4	60.48

Example (6 RBs x 12 tones/RB x 2 bits/tone x 14 KHz = 2.016 Mbps)

Code overhead included

- Individual users
  - 12 x 12 = 144 kbps for RB=1, lcp
  - 12 x 14 = 168 kbps for RB=1, scp

- Cellular attempts to address low-bandwidth uses where power may be very limited.
  - MIMO can reduce power to get same data rate or can also permit more narrow bandwidth use for same rate.



# Wider Bands need more (licensed) spectra

- Wider bandwidths are for higher speeds.
  - MIMO helps that also.
  
- Cellular's
  - 20 MHz option can use a Wi-Fi channel. "5G-U"
  
  - "Look before talk."

bwdth MHz	$m$	$1/T'$ MHz	$N + \nu_s$ ( $1/T_s = 14$ kHz)	$N^*$ used tones	samples slot	$\Delta f$ kHz	RBs	$b_{min}$	$L$	$R_{min}$
			$N + \nu_l$ (*) ( $1/T_l = 12$ kHz)					$b_{mid}$	1	$R_{mid}$
								$b_{max}$	1	$R_{max}$
										Mbps *
5	4	7.68	512+24.67 512+128	301	3840 3840	15	25	2	1	8.40
								4	1	16.80
								6	1	25.20
								6	2	50.40
								6	4	100.8
10	8	15.36	1024+49.33 1024+256	601	7680 7680	15	50	2	1	16.80
								4	1	33.60
								6	1	50.4
								6	2	100.8
								6	4	200.16
15	12	23.04	1536 +74 1536+384	901	11520 11520	15	75	2	1	25.20
								4	1	50.40
								6	1	75.6
								6	2	151.2
								6	4	302.4
20	16	30.72	2048 +98.67 2048+384	1201	15360 15360	15	100	2	1	33.6
								4	1	67.20
								6	1	100.8
								6	2	201.60
								6	4	403.20



# Cellular Coding and Loading


- Listed data rates were encoder-output data rates.
- A rate  $1/3$  “turbo code” (8 states in each constituent code, see Chapter 11)
  - Can be punctured from  $1/3$  up to 95%.
- MIMO cellular systems do not return  $M$  from SVD on each tone in Vector OFDM (unlike Wi-Fi)
  - Instead, one of 16 pre-defined  $M$ 's is selected during training/adaptation (called a “codebook”), see L5:29-30.
- Loading will select code-puncturing, power level for RB, and the constellation size.



# 4G's Turbo Code

- IET Engineering Community

The scheme of the Turbo encoder for LTE is a Parallel Concatenated Convolutional Code (PCCC) with two 8-state constituent encoders and one Turbo code internal interleaver. The theoretical structure of a Turbo encoder is represented in the next figure:

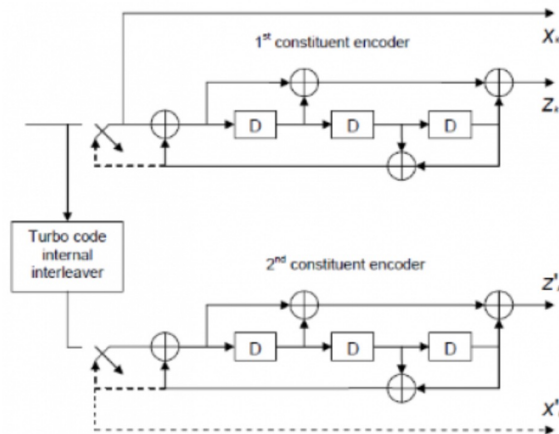

The tail bits are independently appended at the end of each information bit stream to clean up the memory of all registers, for example, by terminating the encoder trellis to a zero state. Generally, the length of the tail bits is equal to the number of registers in one constituent encoder (3 registers are used in one constituent encoder in LTE). The sequence of tail bits is rearranged and 4 tail bits are attached after each information bit stream. Hence, the length of each bit stream becomes  $4+K$ .

See 379A



# Uplink Cellular

- Aggregates RB's into a single carrier (with same cyclic prefix).
  - Presumably saves upstream energy (although not clear that is really true – peak/average with filters - See 4.10).
- The receiver is what was originally known as a “Cyclic DFE” (see Chapter 5).
  - This was overlooked and the oxymoron “SC-OFDM” is in common use. (“single carrier– OFDM”)
  - Long after cyclic DFE name was introduced.
- Same data rates, FFT sizes, etc – just computation executed for minimum number of RB's)





# 5G

- 5G adds some capabilities:
  - Lower band (FR1): 450 MHz -- 6 GHz (FDD/TDD)
  - Millimeter Wave Band: (FR2): 24.25 GHz – 52.6 GHz (TDD only)
  - $\Delta f$  now increased to
    - 15 (same), 30 and 60 kHz in FR1,
    - 60 and 120 kHz in FR2,
    - 5G also adds 256 QAM.
  - Channel Bandwidths now extend to as much as 400 MHz (depends on band).
  - Number of antennas is unlimited (Massive MIMO), but ...
    - Maximum layers (so significant singular values or used dimensions) remains at 8 for a SINGLE user (4 for Uplink).
    - Maximum number of virtual antenna ports for which "SVD-like" info can be supplied is 32 (4 for Uplink).
- See Tables to Follow and also Lecture 12 (Section 7.3)



# 3GPP TS38.101-1 Table 5.2-1: 5G operating bands in FR1/2

Band Name	Uplink		Downlink		Duplex
n1	1920 MHz	– 1980 MHz	2110 MHz	– 2170 MHz	FDD
n2	1850 MHz	– 1910 MHz	1930 MHz	– 1990 MHz	FDD
n3	1710 MHz	– 1785 MHz	1805 MHz	– 1880 MHz	FDD
n5	824 MHz	– 849 MHz	869 MHz	– 894MHz	FDD
n7	2500 MHz	– 2570 MHz	2620 MHz	– 2690 MHz	FDD
n8	880 MHz	– 915 MHz	925 MHz	– 960 MHz	FDD
n20	832 MHz	– 862 MHz	791 MHz	– 821 MHz	FDD
n28	703 MHz	– 748 MHz	758 MHz	– 803 MHz	FDD
n38	2570 MHz	– 2620 MHz	2570 MHz	– 2620 MHz	TDD
n41	2496 MHz	– 2690 MHz	2496 MHz	– 2690 MHz	TDD
n50	1432 MHz	– 1517 MHz	1432 MHz	– 1517 MHz	TDD
n51	1427 MHz	– 1432 MHz	1427 MHz	– 1432 MHz	TDD
n66	1710 MHz	– 1780 MHz	2110 MHz	– 2200 MHz	FDD
n70	1695 MHz	– 1710 MHz	1995 MHz	– 2020 MHz	FDD
n71	663 MHz	– 698 MHz	617 MHz	– 652 MHz	FDD
n74	1427 MHz	– 1470 MHz	1475 MHz	– 1518 MHz	FDD
n75	N/A		1432 MHz	– 1517 MHz	SDL
n76	N/A		1427 MHz	– 1432 MHz	SDL
n78	3300 MHz	– 3800 MHz	3300 MHz	– 3800 MHz	TDD
n77	3300 MHz	– 4200 MHz	3300 MHz	– 4200 MHz	TDD
n79	4400 MHz	– 5000 MHz	4400 MHz	– 5000 MHz	TDD
n80	1710 MHz	– 1785 MHz	N/A		SUL
n81	880 MHz	– 915 MHz	N/A		SUL
n82	832 MHz	– 862 MHz	N/A		SUL
n83	703 MHz	– 748 MHz	N/A		SUL
n84	1920 MHz	– 1980 MHz	N/A		SUL

Band Name	Uplink		Downlink		Duplex
n257	26500 MHz	– 29500 MHz	26500 MHz	– 29500 MHz	TDD
n258	24250 MHz	– 27500 MHz	24250 MHz	– 27500 MHz	TDD
n260	37000 MHz	– 40000 MHz	37000 MHz	– 40000 MHz	TDD

## Downlink Powers

BS class	$P_{\text{rated,c,AC}}$
Wide Area BS	(Note)
Medium Range BS	< 38 dBm
Local Area BS	< 24 dBm

NOTE: There is no upper limit for the  $P_{\text{rated,c,AC}}$  rated output power of the Wide Area Base Station.

Source: 3GPP TS38.104 Table 6.2.1-1: BS type 1-C rated output power limits for BS classes

Uplink Power limit is 23 dBm, except n41, which is 26 dBm.



# 3GPP TS38.101-1 Table 5.3.5-1: Channel Bandwidths for Each 5G FR1 band

NR Band	NR band / SCS / UE Channel bandwidth											
	SCS kHz	5 MHz	10 <sup>1,2</sup> MHz	15 <sup>2</sup> MHz	20 <sup>2</sup> MHz	25 <sup>2</sup> MHz	30 MHz	40 MHz	50 MHz	60 MHz	80 MHz	100 MHz
n1	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60		Yes	Yes	Yes							
n2	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60		Yes	Yes	Yes							
n3	15	Yes	Yes	Yes	Yes	Yes	Yes					
	30		Yes	Yes	Yes	Yes	Yes					
	60		Yes	Yes	Yes	Yes	Yes					
n5	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60											
n7	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60		Yes	Yes	Yes							
n8	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60											
n20	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60											
n28	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60											
n38	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60		Yes	Yes	Yes							
n41	15		Yes	Yes	Yes			Yes	Yes			
	30		Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes
	60		Yes	Yes	Yes			Yes	Yes	Yes	Yes	Yes
n50	15	Yes	Yes	Yes	Yes			Yes	Yes			
	30		Yes	Yes	Yes			Yes	Yes	Yes	Yes	
	60		Yes	Yes	Yes							
n51	15	Yes										
	30											
	60											
n66	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes			Yes				
	60		Yes	Yes	Yes			Yes				



# Continued from previous slide

NR band / SCS / UE Channel bandwidth												
NR Band	SCS kHz	5 MHz	10 <sup>1,2</sup> MHz	15 <sup>2</sup> MHz	20 <sup>2</sup> MHz	25 <sup>2</sup> MHz	30 MHz	40 MHz	50 MHz	60 MHz	80 MHz	100 MHz
n70	15	Yes	Yes	Yes	Yes	Yes						
	30		Yes	Yes	Yes	Yes						
	60		Yes	Yes	Yes	Yes						
n71	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60											
n74	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60		Yes	Yes	Yes							
n75	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60		Yes	Yes	Yes							
n76	15	Yes										
	30											
	60											
n77	15		Yes		Yes			Yes	Yes			
	30		Yes		Yes			Yes	Yes	Yes	Yes	Yes
	60		Yes		Yes			Yes	Yes	Yes	Yes	Yes
n78	15		Yes		Yes			Yes	Yes	Yes	Yes	Yes
	30		Yes		Yes			Yes	Yes	Yes	Yes	Yes
	60		Yes		Yes			Yes	Yes	Yes	Yes	Yes
n79	15							Yes	Yes	Yes	Yes	Yes
	30							Yes	Yes	Yes	Yes	Yes
	60							Yes	Yes	Yes	Yes	Yes
n80	15	Yes	Yes	Yes	Yes	Yes	Yes					
	30		Yes	Yes	Yes	Yes	Yes					
	60		Yes	Yes	Yes	Yes	Yes					
n81	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60											
n82	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60											
n83	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60											
n84	15	Yes	Yes	Yes	Yes							
	30		Yes	Yes	Yes							
	60		Yes	Yes	Yes							



# FR2 band: 3GPP TS38.101-2 Table 5.3.5-1: Channel bandwidths

NR band / SCS / UE Channel bandwidth					
NR Band	SCS kHz	50 MHz	100 MHz	200 MHz	400 MHz
n257	60	Yes	Yes	Yes	Yes
	120	Yes	Yes	Yes	Yes
n258	60	Yes	Yes	Yes	Yes
	120	Yes	Yes	Yes	Yes
n260	60	Yes	Yes	Yes	Yes
	120	Yes	Yes	Yes	Yes

- At mmW frequencies of FR2, these wider-bandwidth channels are only a small fraction of total bandwidth in this range.



# Resource Blocks

SCS (kHz)	5MHz	10MHz	15MHz	20 MHz	25 MHz	30 MHz	40 MHz	50MHz	60 MHz	80 MHz	100 MHz
	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$
15	25	52	79	106	133	[TBD]	216	270	N/A	N/A	N/A
30	11	24	38	51	65	[TBD]	106	133	162	217	273
60	N/A	11	18	24	31	[TBD]	51	65	79	107	135

SCS (kHz)	50MHz	100MHz	200MHz	400 MHz
	$N_{RB}$	$N_{RB}$	$N_{RB}$	$N_{RB}$
60	66	132	264	<u>N.A</u>
120	32	66	132	264

$$R = 168 \text{ kHz} \times N_{RB} \times b \times L \times \frac{\Delta f}{15 \text{ kHz}}$$

Example  $R = 168 \times 133 \times 4 \times 4 \times 2 = 715.008\text{Mbps}$

- 5G is slightly more efficient in more RB's allocated at lower frequencies too (than 4G).





# End Lecture 6